



# HOW TO RE-ACTIVATE YOUR ODORSOK

Please read this simple maintenance schedule.


**STEP 1:** MACHINE WASH when dusty or reduction in airflow becomes apparent.

**STEP 2:** TUMBLE DRY when wet or if odor becomes apparent.

**NOTE:** Do not wash with soap or detergents. They will be adsorbed by the carbon cloth which will ultimately shorten the lifespan.

When used in high humidity areas, ODORSOK will need to be re-activated when saturation occurs (odor break through). Tumble drying (hot) or blow drying the ODORSOK will remove all moisture and re-activate the carbon cloth. This may be repeated as many times as necessary until the ODORSOK reaches true saturation from pollutants (approximately. one year).

The graph below suggests two examples of when heat re-activation may be necessary.

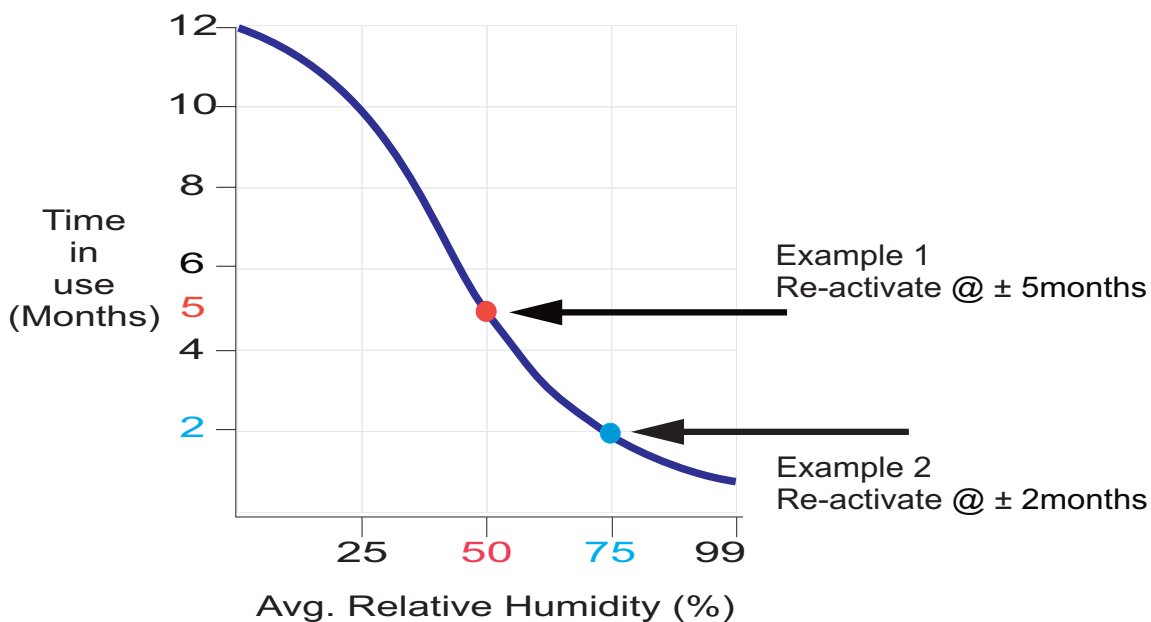

NOTE: Use graph as guide only. Humidity & dew point calculations are complex and vary with climate.